


DECLARATION OF PERFORMANCE (DOP)

N° ERM-SUSP-SE-2013-10-GB (CPR 305 / 2011)

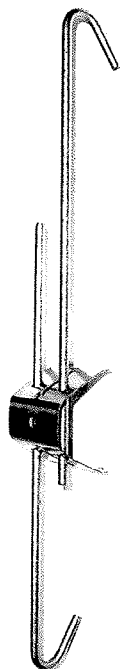

1 - Identification of the product : **HANGER SE CC** and **SE CO**

2 - Serial number allowing identification of the product :

Labels on boxes with product reference and characteristics
Product number on boxes for tracability

3 - Using product :

Ceiling suspensions for use internally in buildings

4 - Manufacturer :

ERMELEC SA 11 rue de Rouen - Z.I. Limay Porcheville
78440 Porcheville - France

6 - System of assessment and verification of constancy of performance :

System 3

Products delivered with this DOP have :

- Factory production controls : loading tests of samples,
- Traçability with product number on each box.

7 - Reference norm :

Some tests has been made for products of this DOP, in conformity with the European Norm CE 13964-2004 / A1:2006 :

- Loading test n° BMA6-90039
- Dynamic test n° BPI-6-7-0158

9 - Product characteristics and performances :

Steel XC 75	Thickness 0,5 mm +0/-0.05 mm
	Protection electro zingage 2 - 3 μ
Wire steel	Diameter 3,80 mm +/- 0,06 mm
	Galvanisation protection 50 - 60 g/m ² 7 - 8 μ

Durability : Protection corrosion Class A (EN 13964 : 2004 / A1 :2006)

Fire reaction : A1 (EN 13501-1 :2007)

Safe load : Maximum static load : 30 daN with closed hook
(EN 13964 : 2004 / A1 :2006)

Applications :

- ◆ Hangers must be used in dry places.
- ◆ Hooks must be closed.
- ◆ Hangers « Constantes SE 23 » must be used with wire from our company.
- ◆ Hangers can not be used in chlorinated atmosphere. For other special use or atmosphere, please contact us.

10 - Performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9

This declaration of performance is issued under the responsibility of the manufacturer in point 4